



## Large-scale Spacecraft Fire Safety Tests

**Urban, David L.; Ruff, Gary A.; Ferkul, Paul; Olson, Sandra ; Fernandez-Pello, A. Carlos; T'ien, James S. ; Torero, Josw L.; Cowlard, Adam; Rouvreau, Sebastien; Minster, Olivier**

*Total number of authors:*  
16

*Publication date:*  
2014

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Urban, D. L., Ruff, G. A., Ferkul, P., Olson, S., Fernandez-Pello, A. C., T'ien, J. S., Torero, J. L., Cowlard, A., Rouvreau, S., Minster, O., Toth, B., Legros, G., Eigenbrod, C., Smirnov, N., Fujita, O., & Jomaas, G. (2014). *Large-scale Spacecraft Fire Safety Tests*. Poster session presented at 35th International Symposium on Combustion , San Francisco, United States.

---


### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Large-scale Spacecraft Fire Safety Tests

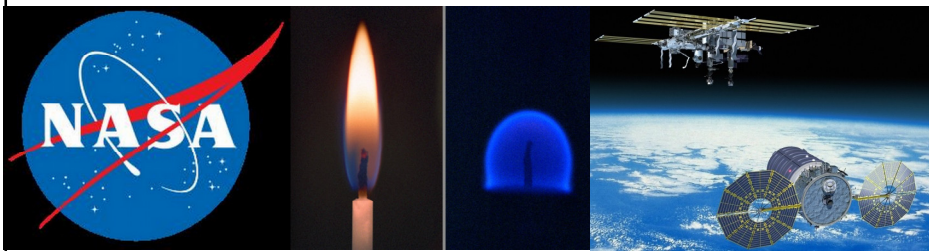

David L. Urban, Gary A Ruff, Paul Ferkul and Sandra Olson: NASA Glenn Research Center, Cleveland, OH, USA  
 A. Carlos Fernandez-Pello: UC Berkeley, Berkeley, CA, USA  
 James S. T'ien: Case Western Reserve University, Cleveland, OH, USA  
 Jose L. Torero University of Queensland, Brisbane, Australia  
 Adam Cowland: University of Edinburgh, Edinburgh, UK  
 Sebastien Rouvreau: Belisama R&D, Toulouse, France



Olivier Minster and Balazs Toth: ESA ESTEC, Noordwijk, Netherlands  
 Guillaume Legros: Université Pierre et Marie Curie, Paris, France  
 Christian Eigenbrod: University of Bremen (ZARM), Bremen, Germany  
 Nickolay Smirnov: Moscow Lomonosov State University, Moscow, Russia  
 Osamu Fujita: Hokkaido University, Sapporo, Japan  
 Grunde Jomaas: Technical University of Denmark, Kgs. Lyngby, Denmark




## International Topical Team

The experiment is an international collaboration between numerous space agencies. The collaboration is managed by an International Topical Team including participation by NASA and ESA, plus a group of international scientists (pictures below), that aims to revolutionize spacecraft fire safety designs for next-generation space vehicles and habitats. It will feature a validation experiment in the pressurized interior environment of the unmanned Cygnus vehicle (Orbital Sciences) after it has completed its supply mission to the International Space Station. Currently, three flights are scheduled (Saffire I-III, corresponding to Orbital 5-7).




## Vehicle Configuration

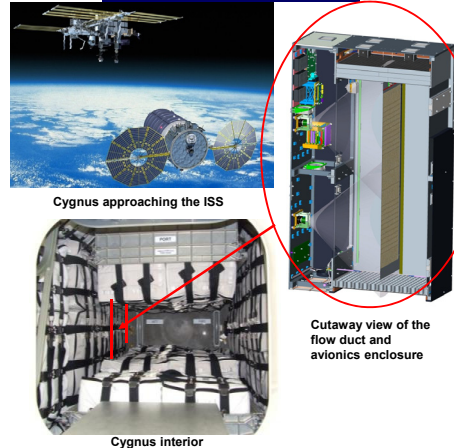


## Problem Identification

Full scale fire testing complemented by computer modeling has substantially improved our understanding of the risk, prevention and suppression of fire in terrestrial systems (cars, ships, planes, buildings, mines, and tunnels). In comparison, no such testing has been carried out for manned spacecraft due to the complexity, cost and risk associated with operating a material flammability experiment of a relevant size and duration in microgravity. Therefore, there is currently a gap in knowledge of fire behavior in spacecraft.



NASA Test1 challenges



Flammability limits differ


## Sample Layout Flights I and III

The samples in Saffire I and III will be 40.6 cm by 94.0 cm of cotton / fiberglass blend (Sibal cloth) 75% cotton by weight (18.05 mg/cm<sup>2</sup>)

Embedded thermocouples at 0, 0.3 and 0.8 cm above the surface in 2 locations to estimate the flame position and the standoff distance in order to compare with the video footage.




1-g experiment

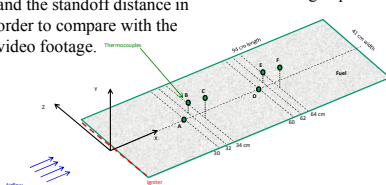

## Sample Layout Flight II

### Saffire II Samples




Sample Layout for Saffire II

Samples are 5 cm x 30 cm

Material	Sample Thickness	Air Flow (cm/s)	Igniter Position
Silicone (Flammability limit 1)	0.25 mm (0.010")	20	Bottom
Silicone (Flammability limit 2)	0.61 mm (0.024")	20	Bottom
Silicone (Flammability limit 3)	1.02 mm (0.040")	20	Bottom
Silicone (Downward burn 1)	0.36 mm (0.014")	20	Top
SIBAL fabric (SIBAL 1)	0.33 mm (0.013")	20	Bottom
SIBAL fabric (SIBAL 2)	0.33 mm (0.013")	30	Bottom
PMMA to Nomex (Transition 1)	0.33 mm (0.013")	20	Bottom
Structured PMMA (Thick 1)	10 mm with tapered edge for ignition	20	Bottom
Flat PMMA (Thick 2)	10 mm with tapered edge for ignition	30	Bottom


## Numerical Modeling

A detailed three-dimensional transient concurrent flame spread model, featuring an adaptive mesh refinement method that will resolve in detail the spreading flame base and pyrolysis front, will be utilized to predict recent ISS experiments and future Saffire tests.

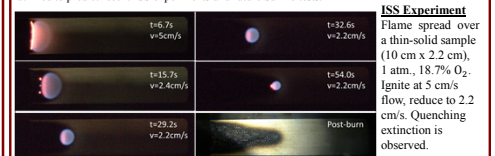


### Numerical Modeling

Same sample as above, 1 atm., 17.5% O<sub>2</sub>. Ignite at 10 cm/s flow, reduced to 4 cm/s. Quenching extinction is observed.

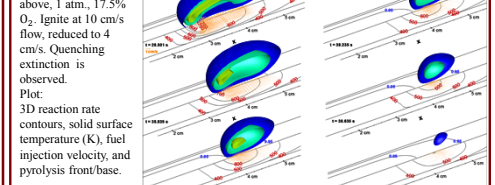


## Nomex Ignition Testing




Tests have been conducted with Nomex HT90-40 to find the limiting oxygen concentration (LOC) for flame spread as a function of ambient pressure in a quiescent environment. The igniter was a hot wire: 18 V at 65 A. The results with Nomex HT90-40 revealed that having a forced flow, or mixed flow over the fabric surface versus a quiescent environment resulted in different LOC values. The strong dependence on pressure suggests either kinetic effects or flow effects.

When the results are plotted in terms of the oxygen partial pressure, the flammability boundary follows a nearly linear relationship with respect to ambient pressure. The non-zero intercept corresponds to the curvature seen on the O<sub>2</sub> concentration versus pressure graph. The decreasing nature raises an important issue in reduced ambient pressure environments. For a constant oxygen partial pressure, such as in normoxic equivalent atmospheres, it is possible that a fire resistant material can become flammable depending on the ambient pressure.




## Effect of Surface Structures



PMMA-sample to be processed onboard the Cygnus-spacecraft

Effect of different surface structures on flame propagation (PMMA, 1g)

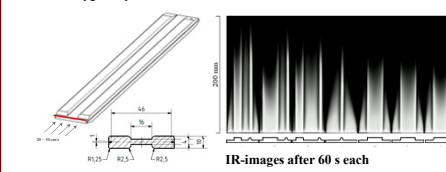

## The Road Ahead

The large-scale material flammability demonstration will facilitate the understanding of the long-term consequences of a potential spacecraft fire and provide data not only for the verification of detailed numerical models of such an event, but also for the development of predictive models that can assist and optimise fire prevention, response and mitigation.

The first step is to provide a predictive tools that will integrate fire safety into design and management of space vehicles. Such tools will integrate a wide range of design issues including, but not limited to, material selection, emergency response, crew training, post-fire clean-up, fire detection, fire suppression, environmental control and life support (ECLS) system design, and even atmosphere selection to provide a globally optimised solution.

Contact David Urban  
 (david.urban@nasa.gov) and / or Grunde Jomaas (grujo@byg.dtu.dk) for more information or to express interest in participation.